


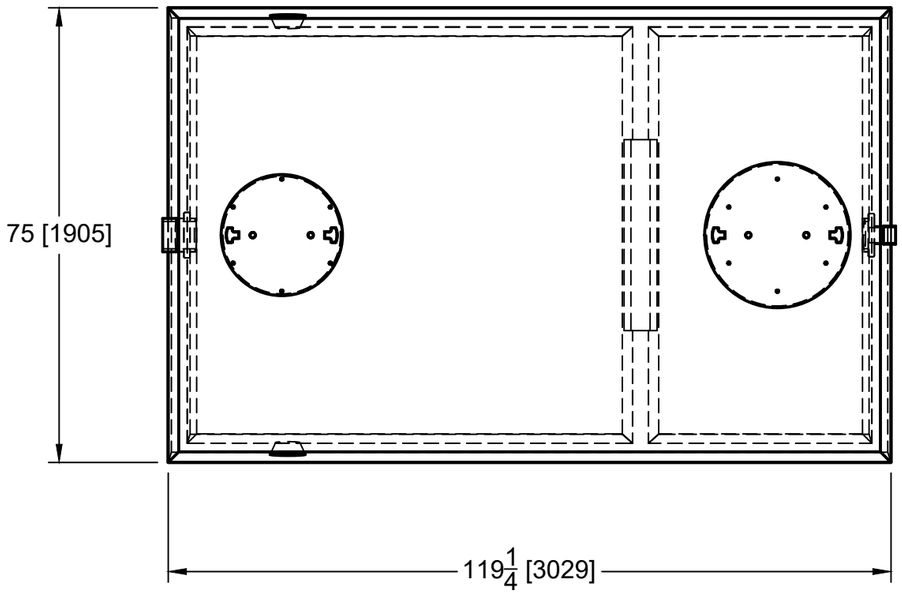


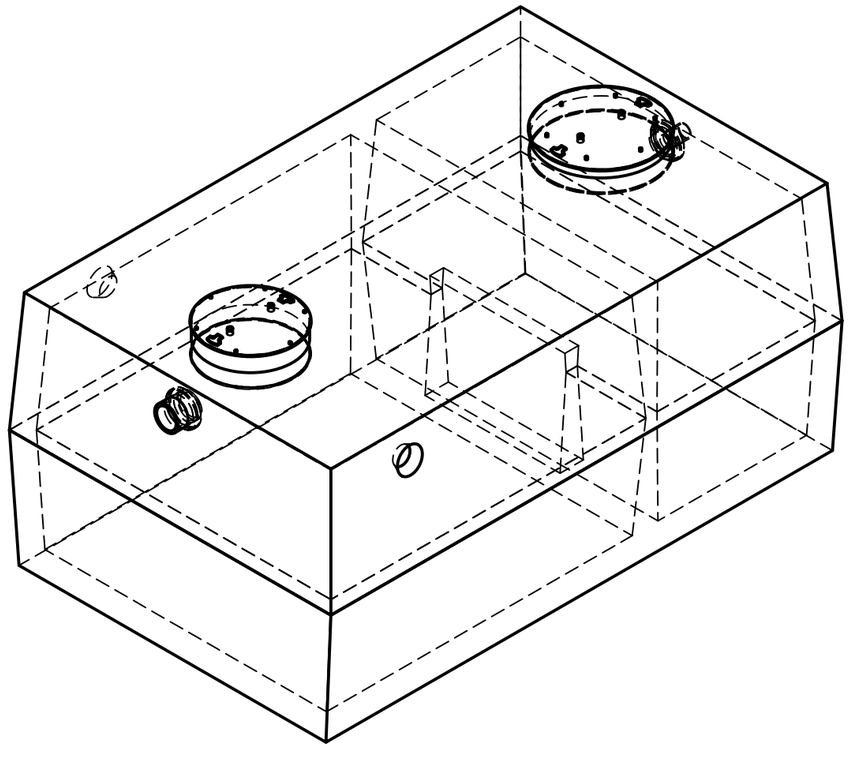

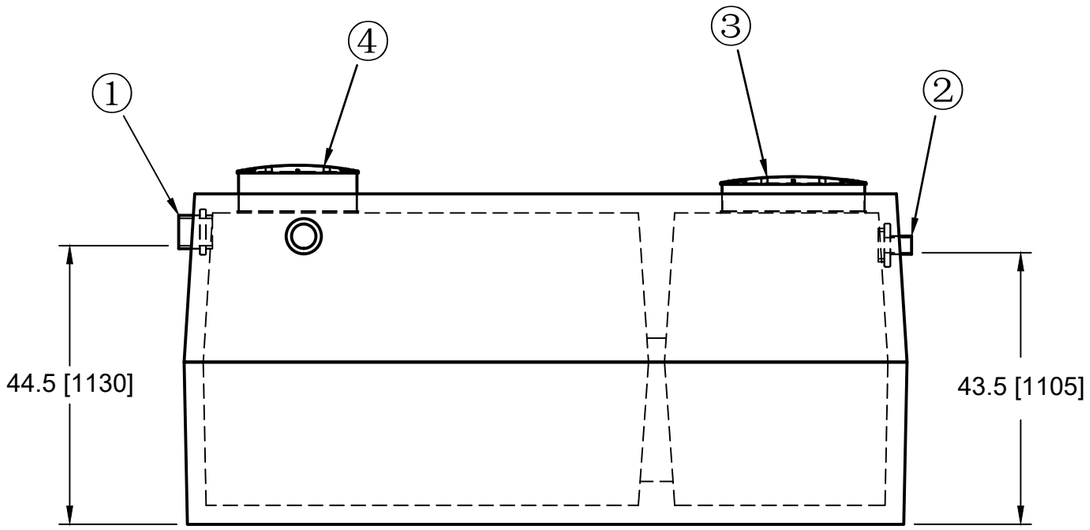

1: 4" Inlet rubber
2: 2" Outlet rubber
3: 24" Diameter polylok riser
4: 20"Diameter polylok riser

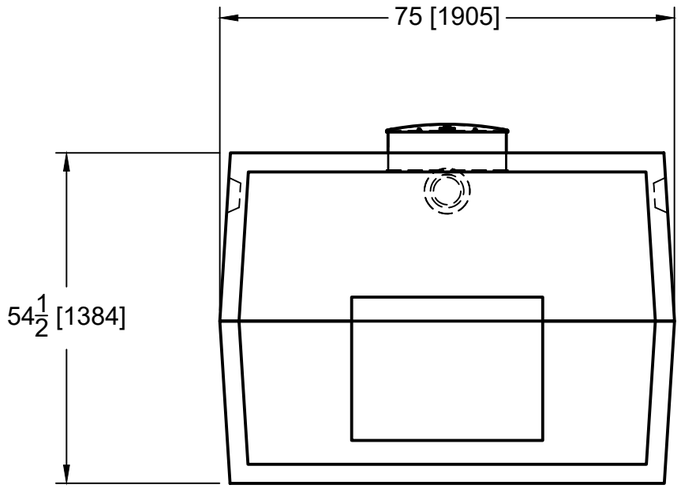

ROSWELL
CONCRETE PRODUCTS

Burial Depth: Recommended max burial depth of 2 metre over top of tank lid away from vehicular travel.
Reinforcing:

Sides / Bottom:tufstrand fibre reinforcement dosed at 3kg/m3

Top: 10m and 15m rebar longitudinally mazx 10" ct, 1" cover
10m rebar laterally max 12" ctc 1" cover

Strength: 35 MpA @ 28 DAYS MIN
Air enttrainment: 5-8%

Joints: Conseal 102 mastic applied at factory by Roswell Concrete

Top Weight
2.7 tons

Bottom Weight
3.1 tons

Assembled Weight
5.8 tons

4680L (1035)
Pump Chamber

PC100